

WET BARREL HYDRANTS

The fire hydrants, which are used as the **water source** of the professional teams, who have fire trained, and the fire brigade in firefighting, are designed to maintain their functionality for many years and to be easily noticed in case of an emergency.

It allows remote intervention in risky areas and is designed to be resistant to external weather conditions in the areas where used. On the other hand, it has an easy access design in case of emergency and provides the opportunity to create an aesthetically "safe environment".


GENERAL FEATURES

Wet barrel hydrants;
hydrant body is always filled with water, because of it, they are recommended for use in environments without freezing conditions and designed as the wet type.

- Hydrant body is manufactured out of cast iron and coated above according to the EN 1503-3 and EN-GJL-250 RAL 3002 red painted coated and the parts below RAL 9005 black.
- Type A is manufactured as not breakable.
- The hydrant has two water outlets as standard, at the end of the outlets, there are made of brass 2½" (DN 65) fire valves. Also, at the end of the valves, there are 2½" (DN 65) **aluminium** Storz type couplings and blind caps.
- As requested, the hydrant can be manufactured with 3 water outlets and different types of blind caps (ie: BS, NH, GOST, etc.).





- Each hydrant is subjected to %100 pressure testing and quality control.

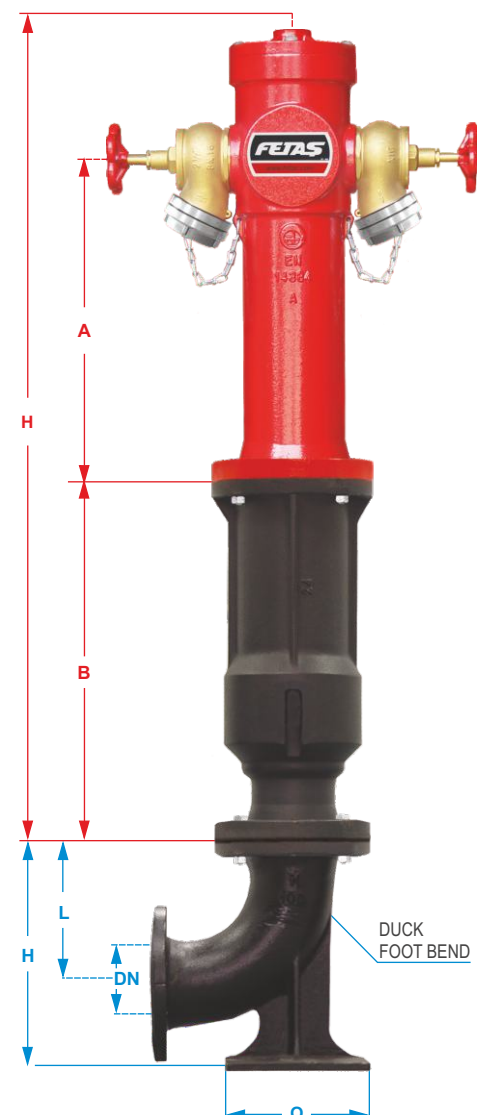


DN	WET BARREL MODEL	TYPE	DIMENSIONS (mm)			Water Outlet
			B Part Below ground	A	H	
80	WB.1610	A	500	450	1200	2 x 2½"
100	WB.1615	A	500	450	1220	2 x 2½"
150	WB.1625	A	500	450	1255	2 x 2½"

DUCK FOOT BEND MODEL	DN	DIMENSIONS (mm)		
		L	Q	H
F 0190	80	165	180	275
F 0191	100	180	200	305
F 0225	150	190	155	330


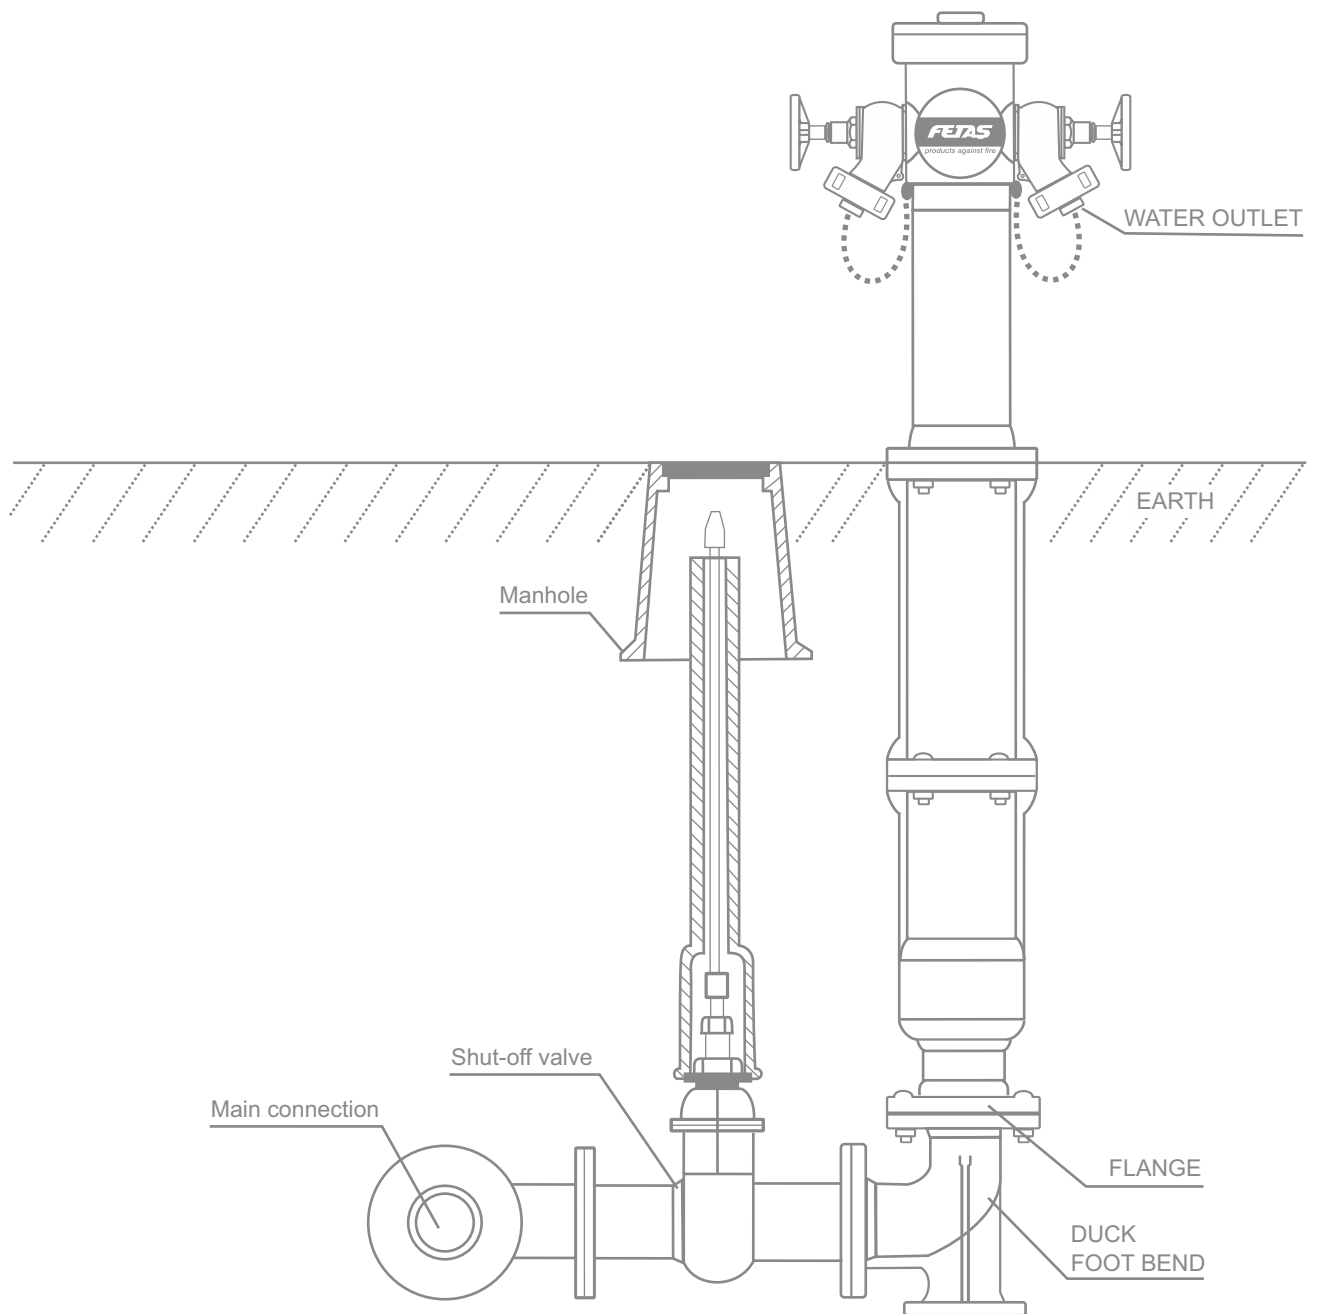


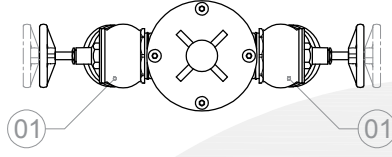

WB 1615 MODEL**DN100****ISLAK TİP YANGIN HİDRANTI
WET BARREL FIRE HYDRANT****ÜST GÖRÜNÜŞ
TOP VIEW**

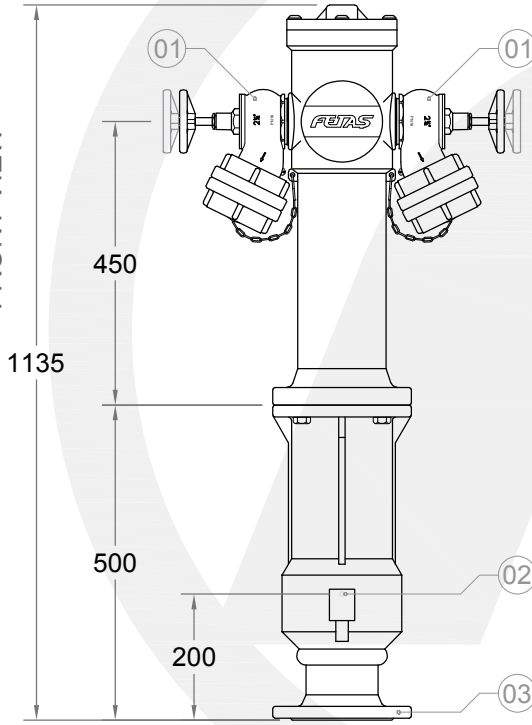- 01 2½" Yangın Vanası
2½" Fire Valve
- 02 Otomatik Drenaj Vanası
Automatic Drainage Valve
- 03 PN16 Flanş / Flange

**ÖN GÖRÜNÜŞ
FRONT VIEW**

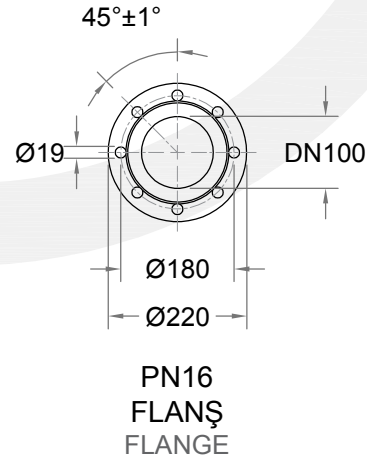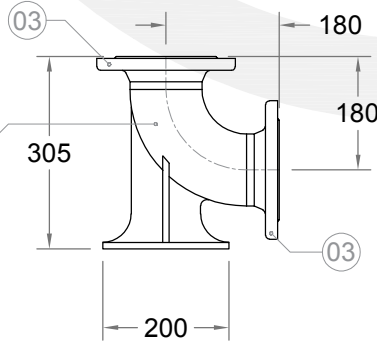Topuklu Dirsek
OPSİYONEL!
Duck Foot Bend
OPTIONAL!

**DN 100 - TİP A - SU ÇIKIŞI : 2 x 2½" / DN 100 - TYPE A - WATER OUTLET : 2 x 2½"**

ÇİZEN / DRW. BY	Yasin DEMİR	YÜZEY FINISH	—	ÖLÇEK / SCALE		TR	 Fetaş Yangın Ekipmanları Makina Metal Sanayi ve Ticaret A.Ş. Dağyaka Mah. 2035. Cad. Küme Evleri No: 51, Kahramankazan 06980 Ankara - TÜRKİYE Tel: +90. 444 96 69 info@fetas.com www.fetas.com
KONT. / CONT.BY	Emre YİĞİTTEKİN	MALZEME MATERIAL	—				
ONAY / APP. BY	Cihan TUNA	AĞIRLIK WEIGHT	—	BİRİM / UNIT		EN	
TARİH / DATE	03.09.2025	SAYFA PAGE	1 / 1	A4			
ÇİZİM KODU DAWING CODE	WB 1615 MODEL						

-Tüm hakları saklıdır. Bu belge, FETAŞ'tan yazılı izin alınmaksızın hiçbir şekilde üçüncü şahıslara çoğaltılamaz veya iletilmez. Ürünlerimizi geliştirmeye yönelik sürekli araştırma ve geliştirme çalışmaları yürütülmekte olup, bu nedenle önceden bildirimde bulunmaksızın herhangi bir teknik özelliği değiştirme hakkımız saklıdır.
-All rights reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from FETAŞ. Continuous research and development is taking place to improve our products and therefore we reserve the right to change any specification without prior notice.